


DATA SHEET

CODICE ARTICOLO F-U130340DX

Specification

Norminal Voltage	12V	
SAE CCA(Cold Cranking Ampere)	340A	
RC (Rerserve Capacity)	40Min.	
Dimension	Length	197mm
	Width	130mm
	Container Height	158mm
	Total Height (with Terminal)	185mm
Approximate Weight	Approx 8.2kg	
Terminal Shape	L type	
Cell-Layout	Layout 0	
Container Material	PP(polypropylene)	
Norminal Operating Temp. Range	25±3 °C (77±5°F)	
Capacity affected by Temperature	40 °C (104°F)	105%
	25 °C (77°F)	100%
	0 °C (32°F)	85%

Self-discharge Characteristic

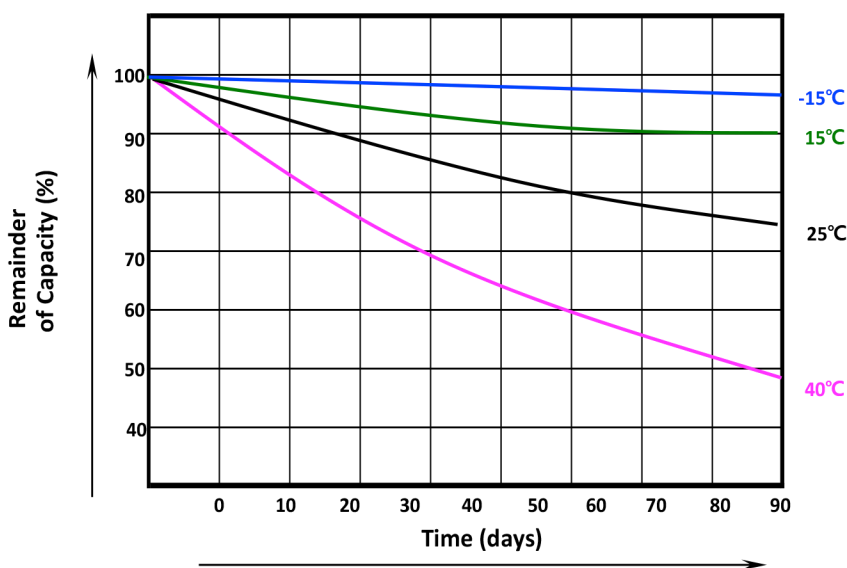

Test definition (SAE J537-2000)

SAE CCA : The battery shall be discharged at specified SAE CCA under -18 °C . This discharge terminated when the battery voltage reaches 7.2V. The discharge time(sec.) should be longer than 30s(±0.2s).

RC : The battery shall be discharged with a current of 25A until the terminal voltage falls to 10.50V ± 0.05V. The duration (min.) of discharge shall be recorded.

